


ASTM A554, JIS 3446, CNC 5802 WELDED PIPES

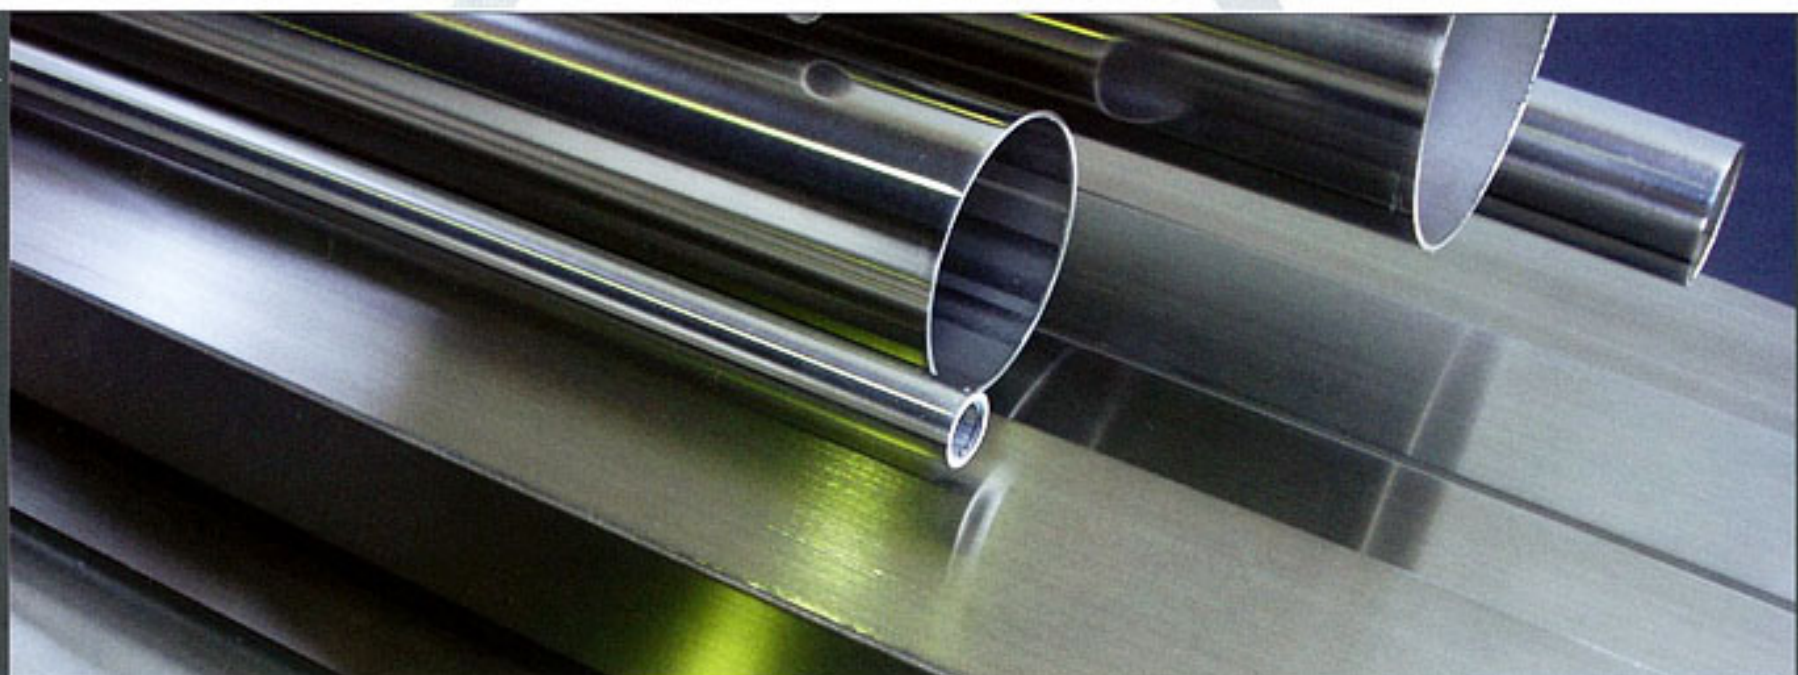

ASTM A554 WELDED PIPES

Our range of welded stainless steel pipes are available in Grid 600, 400, 320 and 180 polish.

STANDARD DIMENSIONS AND WEIGHT

STAINLESS STEEL ROUND TUBING (ASTM A554, JIS G3446, CNC5802)

Outside Diameter		Wall Thickness (mm)							
		0.6	0.8	1.0	1.2	1.5	2.0	2.5	3.0
(mm)	(inch)	Kg/m	Kg/m	Kg/m	Kg/m	Kg/m	Kg/m	Kg/m	Kg/m
12.7	1/2	0.181	0.237	0.291	0.344	0.418	-	-	-
19.1	3/4	0.277	0.365	0.451	0.535	0.658	-	-	-
22.2	7/8	0.323	0.426	0.529	0.629	0.775	-	-	-
25.4	1"	0.371	0.490	0.608	0.723	0.893	1.17	1.43	1.67
31.8	1 1/4	-	0.618	0.767	0.915	1.13	1.48	1.82	2.15
38.1	1 1/2	-	0.743	0.924	1.10	1.37	1.80	2.22	2.62
44.5	1 3/4	-	-	1.08	1.29	1.607	2.117	2.615	3.101
50.8	2"	-	-	1.24	1.48	1.84	2.43	3.01	3.57
63.5	2 1/2	-	-	-	1.86	2.32	3.06	3.80	4.52
76.2	3"	-	-	-	2.24	2.79	3.70	4.59	5.47

STANDARD DIMENSIONS AND WEIGHT

STAINLESS STEEL RECTANGULAR TUBING (ASTM A554)

Outside Dimension	Wall Thickness (mm)				
	1.0	1.2	1.50	2.0	3.0
(mm)	Kg/m	Kg/m	Kg/m	Kg/m	Kg/m
20.0 x 40.0	0.920	1.096	1.358	1.776	-
50.8 x 25.4	1.16	1.40	1.74	2.29	3.43
60.0 x 30.0	1.396	1.667	2.070	2.708	-
60.0 x 40.0	1.554	1.858	2.308	3.045	4.473
75.0 x 25.0	1.554	1.858	2.308	3.045	4.473
100.0 x 50.0	-	2.877	3.519	4.610	6.895